

**ESCORT / PULL BACK TOWING FITTING (OCIMF)**

**FOR TUG OWNER**


-- Towing Line with eyes, at least 1800mm in length.

**FOR TANKER OWNER**

Equipment	20,000 to 50,000 DWT	> 50,000 DWT
<b>FAIRLEAD - CHOCK</b>	<ul style="list-style-type: none"> <li>• EU Type, Deck Mounted.</li> <li>• Nominal Size : 500 x 400mm.</li> <li>• Safe Working Load : 1000 KN.</li> <li>• Min. Breaking Load : 2000 KN.</li> </ul>	<ul style="list-style-type: none"> <li>• EU Type, Deck Mounted.</li> <li>• Nominal Size : 600 x 450mm.</li> <li>• Safe Working Load : 2000 KN.</li> <li>• Min. Breaking Load : 4000 KN.</li> </ul>
<b>DECK BOLLARD</b>	<ul style="list-style-type: none"> <li>• Double Bitt</li> <li>• Nominal Size : 400mm.</li> <li>• For Rope BL : 64 Ton.</li> <li>• Figure-of-Eight Belayed : 32 Tons</li> </ul>	<ul style="list-style-type: none"> <li>• Double Bitt</li> <li>• Nominal Size : 500mm.</li> <li>• For Rope BL : 100 Ton.</li> <li>• Figure-of-Eight Belayed : 50 Tons</li> </ul>
<b>STRONGPOINT - BOLLARD</b>	<ul style="list-style-type: none"> <li>• Model : DB-138, Double Bitt</li> <li>• Nominal Size : 500mm.</li> <li>• Safe Working Load : 1000 KN.</li> <li>• Min. Breaking Load : 2000 KN.</li> <li>• For Single Eye Towing Line or Grommet.</li> </ul>	<ul style="list-style-type: none"> <li>• Model : SB-131, Single Bitt</li> <li>• Nominal Size : 630mm.</li> <li>• Safe Working Load : 2000 KN.</li> <li>• Min. Breaking Load : 4000 KN.</li> <li>• For Single Eye Towing Line or Grommet.</li> </ul>

- \* Under Deck Stiffening as request.
- \* with Class Type Approval Certificate.

**BILLBOARD**

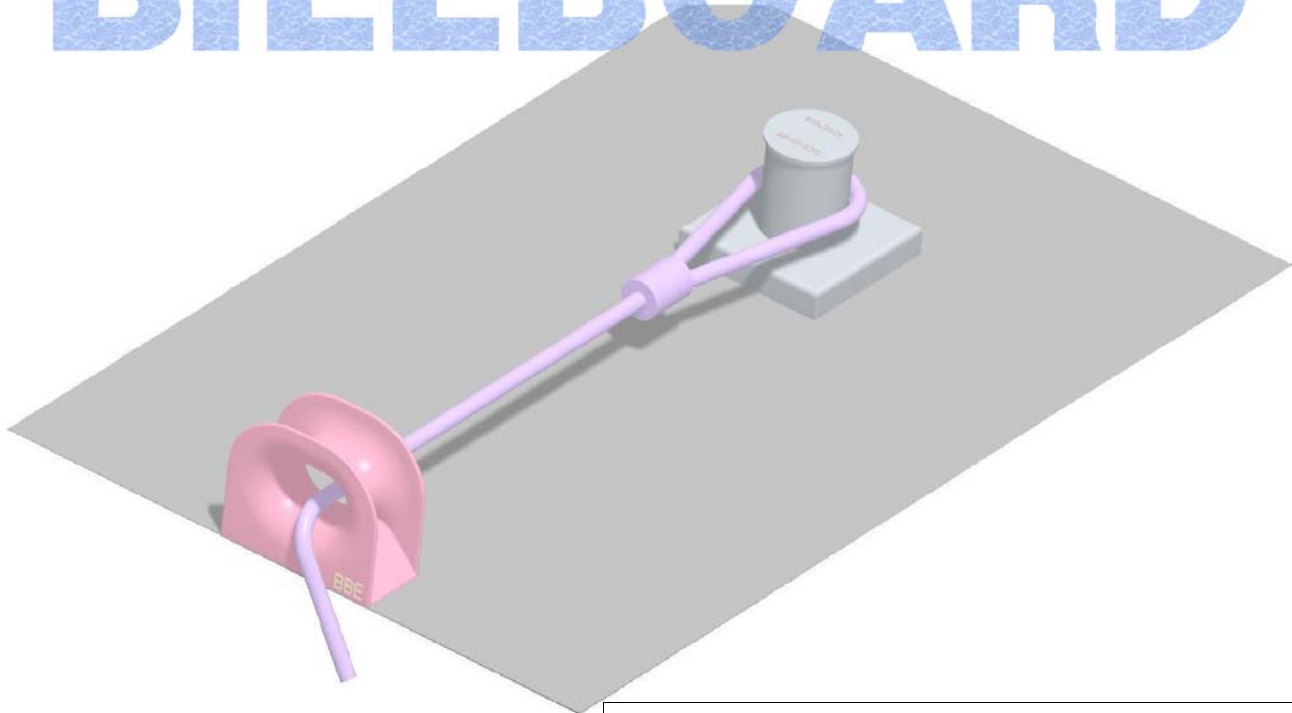

**BillBoard Engineering Co. Ltd.**  
 Room 1106, Entrepot Centre,  
 117 How Ming Street, Kwun Tong, Hong Kong.  
 Web Site : <http://www.billboard.com.hk>  
 E-mail : [sales@bbeng.com](mailto:sales@bbeng.com)  
 Tel No. (852) 2797 3972 / Fax No. (852) 2304 7011